Solar DC String Box

2 in 2 out DC 1000V

General Data		DC Surge Arrester	BUD-40/3
Model No.	BHS-2/2	Max Operation Voltage (Ucpv)	1000V
Input	2 strings	Standard Compliance with	EN 50539 Type 2
Output	2 strings	Maximum Discharge Current	40 KA
Maximum Voltage	1000V	Certification	TUV CE
Max DC Short Circuit Current Per Input (Isc)	15A(Changeable)		
Maximum Current Output	15A		
Enclosure	**BX-15**	**Environment**	
Material Type	Polycarbonate/ABS	Operating Temperature	-20°C~+60°C
Degree of Protection	IP65	Humidity	99%
Degree of Resistance to Impacts	IK10	Altitude	2000M
Dimension (WxHxD)	334x210x122mm	Installation	Wall Mounting
Cable input Entry	PG09 Cable Gland,4-8mm²		
Output Cable Gland	PG21 Cable Gland,13-18mm²		
DC fuse holder	**BR-30**		
LED Indicator	Yes		
Rated Working Voltage	1000V		
Fuse Link	10×38mm OANISO 15A		
Certification	CB,CE		
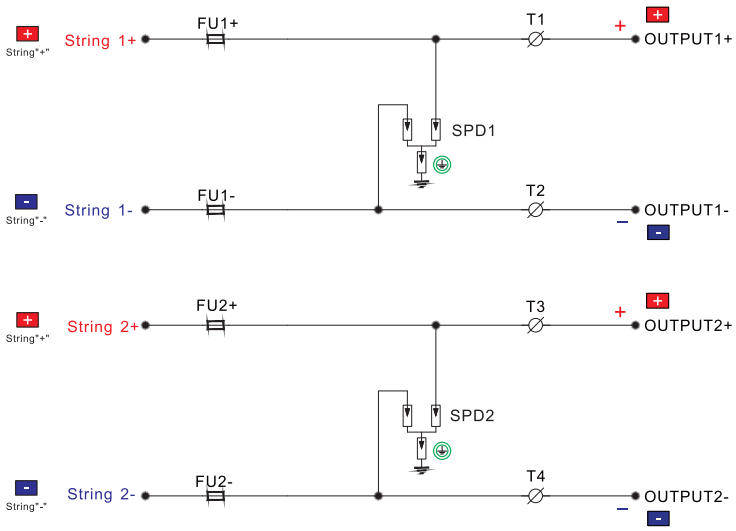
BHS-2/2